

Technical sheet :


M 40-4



 **MANITOU**
HANDLING YOUR WORLD

	Technical characteristics		Metric
1.1	Manufacturer		MANITOU
1.2	Model Name		M 40-4
1.3	Power source		Diesel
1.4	Operator type		Seated
1.5	Max. capacity	Q	4000 kg
1.6	Load center of gravity	c	500 mm
1.8	Load distance, centre of drive axle to fork	x	762 mm
1.9	Wheelbase	y	2120 mm
	Weight		
	Standard mast reference of the machine		FVD 37
2.1	Service weight		7567 kg
2.2	Weight on front axle (laden) / rear axle (laden)		9631 kg / 1936 kg
2.3	Weight on front axle (Unladen) / rear axle (Unladen)		3250 kg / 4317 kg
	Wheels		
3.1	Tires type		Pneumatic
3.2	Dimensions of front wheels		400/80-24 162A A325 SBHRC
3.3	Dimensions of rear wheels		10.5-18 12PR I317 MPT TL
3.5	Number of front wheels / rear wheels		2 / 2
3.5.2	Number of drive wheels		4
3.6	Front wheel gauge	b10	1700 mm
3.7	Rear wheel gauge	b11	1760 mm
	Dimensions		
4.7	Height of overhead guard (cabin)	h6	2555 mm
4.8	Seat height/stand height	h7	1483 mm
4.19	Overall length	l1	4806 mm
4.20	Length to face of forks	l2	3606 mm
4.21	Overall width	b1	2104 mm
4.22	Forks section x width x length	s / e / l	50 mm x 150 mm / 1200 mm
4.23	Fork carriage ISO 2328 (class/form) A/B		FEM 3A
4.24	Fork carriage width	b3	1670 mm
4.31	Ground clearance below mast	m1	368 mm
4.32	Ground clearance at centre of wheelbase	m2	354 mm
4.33	Aisle width for 1000 x 1200 pallet widthways	Ast	6599 mm
4.34	Aisle width for 800 x 1200 pallet lengthways	Ast	6799 mm
4.35	Turning radius	Wa	4637 m
	Performances		
5.1	Travel speed (laden / unladen)		27.20 km/h / 27.20 km/h
5.2	Lifting speed (laden / unladen)		0.39 m/s / 0.39 m/s
5.3	Lowering speed (laden / unladen)		0.49 m/s / 0.37 m/s
5.5	Drawbar pull (Laden)		13651 daN
5.7	Gradeability (laden / unladen)		100 % / 79 %
5.10	Service brake		Hydraulic brakes by loss of pressure
	Transmission type		Torque converter
	Engine		
7.1	Engine brand / model		Deutz / TCD 2,9
7.2	Engine power (kW)		55 kW
7.3	Rated speed		2300 rpm
7.4	Number of cylinders / Capacity of cylinders		4 - 2925 cm³
	Miscellaneous		
8.2	Working hydraulic pressure for attachments		210 bar
8.3	Oil flow rate for attachments		67 l/min
8.4	Sound level at the driver's ear according to DIN 12 053		79.10 dB

M 40-4 - Dimensional drawing

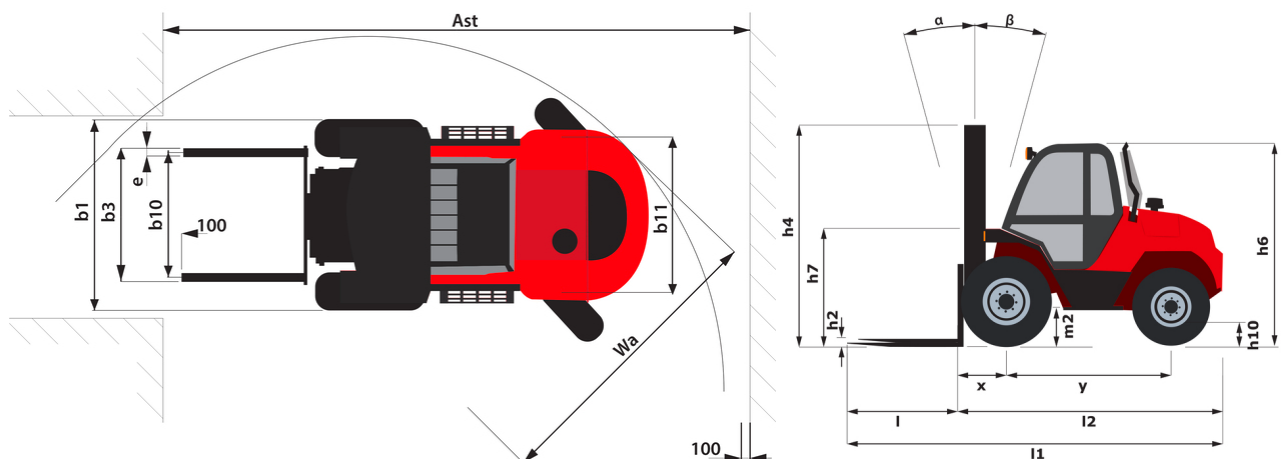

Characteristics of masts and residual capacities

Full Visibility Duplex (FVD)		FVD 30	FVD 33	FVD 35	FVD 37	FVD 40	FVD 45	FVD 50
α - Mast/fork carriage tilt, forward	°	15	15	15	15	15	15	15
β - Mast/fork carriage tilt, backward	°	12	12	12	12	12	12	10
h1 - Mast lowered height	mm	2520	2670	2770	2870	3020	3270	3520
h3 - Mast lifting height	mm	3000	3300	3500	3700	4000	4500	5000
h4 - Mast extended height	mm	4070	4370	4570	4770	5070	5570	6070
Residual capacity at max height	kg	4000	4000	4000	4000	4000		
Residual capacity with hooked-on side shift at max height	kg	4000	4000	4000	4000	4000		
Height at max capacity	mm	3000	3300	3500	3700	4000		
Height at max capacity with hooked-on sideshift	mm	3000	3300	3500	3700	4000		

Free Lift Triplex (FLT)		FLT 37	FLT 43	FLT 45	FLT 47	FLT 50	FLT 55	FLT 60
α - Mast/fork carriage tilt, forward	°	15	15	15	15	10	10	10
β - Mast/fork carriage tilt, backward	°	12	12	12	12	12	12	12
h1 - Mast lowered height	mm	2270	2470	2545	2605	2720	2870	3045
h2 - Mast free lift	mm	1255	1455	1530	1590	1705	1855	2030
h3 - Mast lifting height	mm	3700	4300	4500	4700	5000	5500	6000
h4 - Mast extended height	mm	4770	5370	5570	5770	6070	6570	7070
Residual capacity at max height	kg	4000	4000	4000				
Residual capacity with hooked-on side shift at max height	kg			3800		3100	2000	
Height at max capacity	mm	3700	4300	4500				
Height at max capacity with hooked-on sideshift	mm			4000		3700	3700	

Full Visibility Triplex (FVT)		FLT 40
α - Mast/fork carriage tilt, forward	°	15
β - Mast/fork carriage tilt, backward	°	12
h1 - Mast lowered height	mm	2370
h2 - Mast free lift	mm	1355
h3 - Mast lifting height	mm	4000
h4 - Mast extended height	mm	5070
Residual capacity at max height	kg	4000
Height at max capacity	mm	4000



Head Office

B.P. 249 - 430 rue de l'Aubinière
44150 Ancenis Cedex - France

Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97

www.manitou.com



This publication provides a description of the configuration versions and options for Manitou products, which may differ for equipment. The equipment presented in this brochure may be part of a series, as an option, or it may not be available, depending on the versions. Manitou reserves the right, at any time and without notice, to amend the specifications described and represented. The specifications provided do not bind the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. List of specifications non-exhaustive. The logos as well as the visual identity of the company are owned by Manitou and cannot be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes